MODULAR TERMINAL BLOCKS — TBD10-XXP

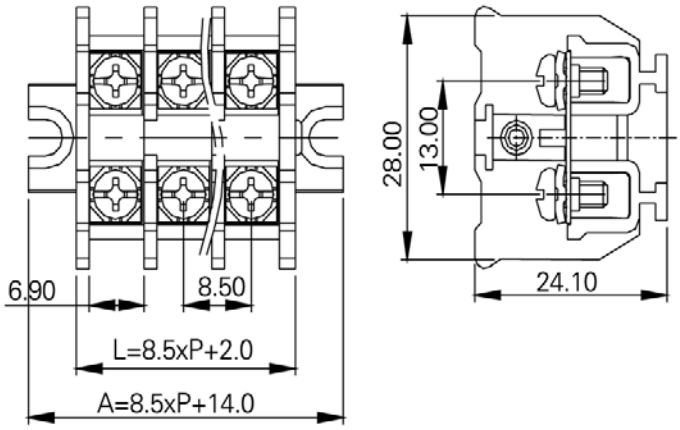

图示(Pic. shown)：TBD10-06P-K

General.	Modular terminal Blocks Rated : 300V,10A，16AWG
	Single row，8.50mm pitch， 02-12 Pole
	Wiring orientation: 180°(wire-to-wire)
	Screw clamp unit: M3.0, 0.8Nm Max

认证（Approval）：

技术参数Technical Data	UL standard			IEC standard		
UL应用组别(UL Application group)	UL Application group			IEC过电压别/污染等级(IEC overvoltage category /pollution degree)		
IEC过电压别/污染等级(IEC overvoltage category /pollution degree)	B	C	D	III / 3	III / 2	II / 2
额定电压(Rated voltage)	300V	300V	300V	--	--	--
额定电流(Rated current)	10A	10A	10A	--	--	--
额定连接容量(Rated connection capacity)	22-16AWG Sol&Str			--		

绝缘材料(Insulation Material)	PC V2
电流承载部件材料和镀层(Material & Plating of Current carrier)	Copper alloy ，Ni plated
接线弹片材料(Material of Clamp spring)	--
绝缘电阻(Insulation Resistance)	500MΩ or more at DC500V
耐电压(1分钟)(Withstanding Voltage/1Min)	2000V
额定冲击电压(Rated surge voltage)	--
接线螺丝(Wire clamp unit Screw)，最大扭矩(torque Max.)	M3.0, 0.8Nm Max
固定螺丝(Mounting Screw)，扭矩(torque)	--
剥线长度(Wire stripping length)	--
使用温度(Operating temperature)	-40°C up to +125°C
焊接方式(Soldering recommend)	--

订购方式(How to order)

TBD	10	—	XXXX	—	XXP	—	K
Series No. 系列号	Differentiate Number 区分号		Special code 特编号 XXXX=custom-made blank=standard		No. of Poles 极数 02-12P		Color 颜色 Black: K

Web:wwww.china-tianli.com TEL:+86-574-6347-9600,6389-6436 Mail : sale@china-tianli.cn
地址:中国浙江省宁波杭州湾新区庵东工业园区纬三路138号
ADD：138，Weisan Rd.,Andong Development Zone,Hangzhou Bay Area,Ningbo,Zhejiang,China

配件 ACCESSORIES FOR MODULAR AND RAIL-MOUNTED SERIES

P/N：TBK10

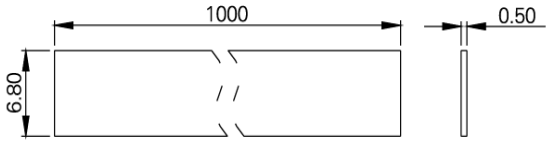
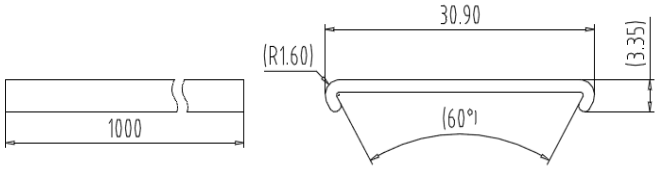
P/N：TBDC10 COVER