




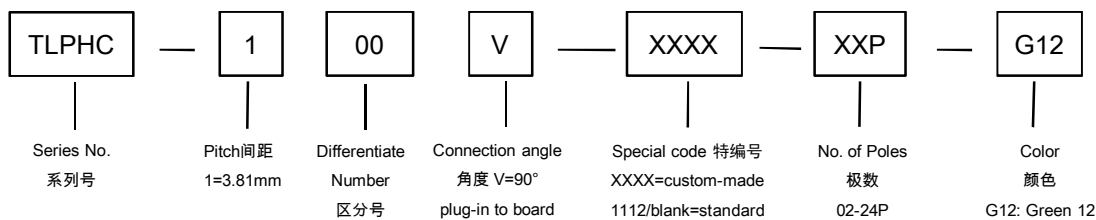
图示(Pic. shown) : TLPHC-100V-1112-05P-G12

General.	PCB Connector Rated : 160V,10A
	Single row , 3.81mm pitch , 02-24 Pole
	Orientation:90°(plug-in to board)

认证 (Approval) :   

技术参数Technical Data	UL standard			IEC standard		
	UL应用组别(UL Application group)	UL Application group			IEC过电压别/污染等级(IEC overvoltage category /pollution degree)	
IEC过电压别/污染等级(IEC overvoltage category /pollution degree)	B	C	D	III / 3	III / 2	II / 2
额定电压(Rated voltage)	300V	--	300V	160V	160V	320V
额定电流(Rated current)	13A	--	10A	10A	10A	10A
额定连接容量(Rated connection capacity)	--			--		
绝缘材料(Insulation Material)	PA66 UL94 V-0					
电流承载部件材料和镀层(Material & Plating of Current carrier)	Copper alloy , Tin plated					
接线弹片材料(Material of Clamp spring)	--					
绝缘电阻(Insulation Resistance)	500MΩ or more at DC500V					
耐电压(1分钟)(Withstanding Voltage/1Min)	2000V					
额定冲击电压(Rated surge voltage)	2500V					
接线螺丝(Wire clamp unit Screw) , 最大扭矩(torque Max.)	--					
固定螺丝(Mounting Screw) , 扭矩(torque)	--					
剥线长度(Wire stripping length)	--					
使用温度(Operating temperature)	-40°C up to +105°C					
焊接方式(Soldering recommend)	Wave soldering ,260°C 5S Max (Single Wave) , 260°C 10S Max(Double Wave)					

订购方式(How to order)



■ 编码片 Coding key



P/N:
TLPCK-001-S

■ 插头 (Female Connector) — single row



P/N : TLPS-100V
Wiring orientation :
180°(wire to plug-in)
Rated : 150V,10A , 1.5mm²
Screw clamp unit: M2 , 0.2N·m



P/N : TLPS-100R
Wiring orientation :
90°(wire to plug-in)
Rated : 320V,10A , 1.5mm²
Screw clamp unit: M2 , 0.2N·m

■ 插头 (Female Connector) — single row



P/N : TLPS-100RL
Wiring orientation :
90°(wire to plug-in)
Rated : 320V,10A , 1.5mm²
Screw clamp unit: M2 , 0.2N·m



P/N : TLPS-101V
Wiring orientation :
180°(wire to plug-in)
Rated : 320V,10A , 1.5mm²
Spring clamp unit.

■ 插头 (Female Connector) — single row



P/N : TLPS-107
Wiring orientation :
180°(wire to plug-in)
Rated : 320V,10A , 1.5mm²
Spring clamp unit.



P/N : TLPS-109V
Wiring orientation :
90°(plug-in to board)
Rated : 320V,10A

■ 插头 (Female Connector) — single row



P/N : TLPS-109R
Wiring orientation :
180°(plug-in to board)
Rated : 320V,10A



P/N : TLPS-111
Wiring orientation :
180°(wire to plug-in)
Rated : 320V,10A , 1.5mm²
Screw clamp unit: M2 , 0.2N·m