

图示(Pic. shown) : TLPSL-007-04P-G12


General.	PCB Connector Rated : 160V,10A,1.5mm ²
	Single row , 3.50mm pitch , 02-24 Pole
	Wiring orientation: 180°(wire to plug-in)
	Spring clamp unit.

认证 (Approval) :



技术参数 Technical Data	UL standard			IEC standard		
	UL Application group			IEC过电压别/污染等级(IEC overvoltage category /pollution degree)		
UL应用组别(UL Application group)	B	C	D	III / 3	III / 2	II / 2
IEC过电压别/污染等级(IEC overvoltage category /pollution degree)				160V	160V	320V
额定电压(Rated voltage)	300V	--	300V	10A	10A	10A
额定电流(Rated current)	8A	--	8A	0.34 ~ 1.5 mm ²		
额定连接容量(Rated connection capacity)	28 ~ 16 AWG			PA66 UL94V-0		
绝缘材料(Insulation Material)				Copper alloy , Tin plated		
电流承载部件材料和镀层(Material & Plating of Current carrier)				Stainless		
接线弹片材料(Material of Clamp spring)				500MΩ or more at DC500V		
绝缘电阻(Insulation Resistance)				1600V		
耐电压(1分钟)(Withstanding Voltage/1Min)				2500V		
额定冲击电压(Rated surge voltage)				--		
接线螺丝(Wire clamp unit Screw) , 最大扭矩(torque Max.)				--		
固定螺丝(Mounting Screw) , 扭矩(torque)				9.5 ~ 10.5mm		
剥线长度(Wire stripping length)				-40°C up to +115°C		
使用温度(Operating temperature)				--		
焊接方式(Soldering recommend)						

订购方式(How to order)

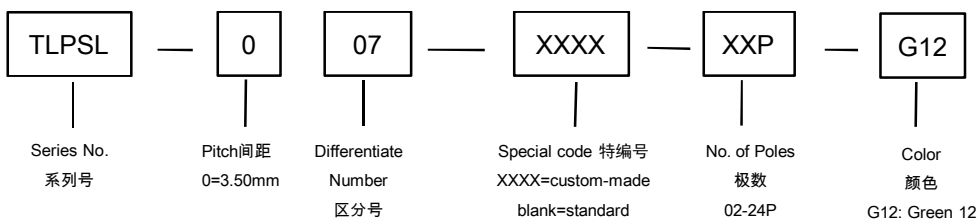

■ 针座 (Pin header) — single row



P/N : TLPHL-001V
Orientation :
90° (plug-in to board)
Rated:160V,10A
Closed side,with pothook



P/N : TLPHL-001R
Orientation :
180° (plug-in to board)
Rated : 160V,10A
Closed side,with pothook

■ 针座 (Pin header) — single row



P/N : TLPHL-001V-XXP-HT
Orientation :
90° (plug-in to board)
Rated:320V,10A
Closed side,with pothook



P/N : TLPHL-001R-XXP-HT
Orientation :
180° (plug-in to board)
Rated : 320V,10A
Closed side,with pothook

■ 针座 (Pin header) — dual row in 1 plane



P/N : TLPHDL-007V
Orientation :
90° (plug-in to board)
Rated : 160V,10A
Closed side,with pothook



P/N : TLPHDL-007R
Orientation :
180° (plug-in to board)
Rated : 160V,10A
Closed side,with pothook

■ 针座 (Pin header) — dual row in 1 plane



P/N : TLPHDL-007V-XXP-HT
Orientation :
90° (plug-in to board)
Rated : 160V,10A
Closed side,with pothook



P/N : TLPHDL-007R-XXP-HT
Orientation :
180° (plug-in to board)
Rated : 160V,10A
Closed side,with pothook